

UTILITY PATENT APPLICATION TRANSMITTAL

(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
NAK1-BM33

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

RECEPTION DISPLAY APPARATUS AND METHOD FOR DISPLAYING SCREEN PARTIALLY WITH CERTAIN TIMING EVEN WHEN ALL DATA FOR THE SCREEN HAS NOT BEEN RECEIVED, AND COMPUTER-READABLE RECORD MEDIUM RECORDING SUCH RECEPTION DISPLAY PROGRAM

and invented by:

Shinji Kawano et al.

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having Eighty-One (81) pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

jc862 U.S. PTO
09/650029

08/28/00

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
NAK1-BM33

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets Thirty-Five (35)
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL230379066US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
NAK1-BM33

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):


Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	19	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	6	- 3 =	3	x \$78.00	\$234.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose) Assignment Recordation					\$40.00
TOTAL FILING FEE					\$964.00

- ☒ A check in the amount of **\$964.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **16-2462** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: August 28, 2000


Signature
Joseph W. Price, Reg. No. 25,124
PRICE AND GESS
2100 S. E. Main St., Ste. 250
Irvine, CA 92614
Tel: 949/261-8433

CC:

JOSEPH W. PRICE
ALBIN H. GESS
MICHAEL J. MOFFATT
GORDON E. GRAY III
BRADLEY D. BLANCHE

OF COUNSEL
JAMES T. KIRK

PRICE AND GESS

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION

TELEPHONE: (949) 261-8433

FACSIMILE: (949) 261-9072

FACSIMILE: (949) 261-1726

e-mail: pgu@pgulaw.com

SPECIFICATION, CLAIMS, AND ABSTRACT EIGHTY-ONE (81) PAGES

Applicant(s):

Shinji Kawano et al.

Title:

RECEPTION DISPLAY APPARATUS AND METHOD
FOR DISPLAYING SCREEN PARTIALLY WITH
CERTAIN TIMING EVEN WHEN ALL DATA FOR THE
SCREEN HAS NOT BEEN RECEIVED, AND
COMPUTER-READABLE RECORD MEDIUM
RECORDING SUCH RECEPTION DISPLAY
PROGRAM

Attorney's

Docket No.:

NAK1-BM33

"EXPRESS MAIL" MAILING
LABEL NO. EL230379066US

DATE OF DEPOSIT: August 28, 2000

RECEPTION DISPLAY APPARATUS AND METHOD FOR DISPLAYING SCREEN
PARTIALLY WITH CERTAIN TIMING EVEN WHEN ALL DATA FOR THE SCREEN
HAS NOT BEEN RECEIVED, AND COMPUTER-READABLE RECORD MEDIUM
RECORDING SUCH RECEPTION DISPLAY PROGRAM

5 BACKGROUND OF THE INVENTION

(1) Field of the Invention

The present invention relates to a reception display
apparatus for receiving data and displaying a screen based on the
received data. More particularly, the present invention relates
10 to a technique for receiving and using broadcast data which is
provided in a plurality of layers.

(2) Description of Related Art

In recent broadcast-type data communications, an idea
similar to the OSI (Open Systems Interconnection) reference model
15 for two-way communications has been introduced. That is to say,
in most of recent standards, the broadcast data is provided in a
plurality of layers and a separate protocol is used for each
layer. Here, the broadcast-type data communications refer to one-
way data communications in which data is transmitted from a
20 transmission side to a reception side.

FIG. 36 shows a process in which the transmission side
generates data blocks in a plurality of lower layers from a data
block in a higher layer.

As shown in FIG. 36, a data block α in the higher layer

is divided into a plurality of pieces of data A, B, C, ... The protocol information is attached to the front and rear of each piece of divided data. The protocol information and a piece of divided data constitute a data block in a lower layer. The
5 protocol information includes at least information necessary for reconstructing a data block in a higher layer. The protocol information attached to the front of data is referred to as header; and the protocol information attached to the rear of data is referred to as footer.

10 FIG. 37 shows a process in which the reception side generates a data block in a higher layer from data blocks in a plurality of lower layers.

As shown in FIG. 37, a data block α in the higher layer is reconstructed from each data block in lower layers based on the
15 protocol information, the header and the footer.

If data were not divided into a plurality of data blocks in a lower layer, all data would have to be received again when a reception error occurs to a part of the data. For example, image files such as a JPEG (Joint Photographic Experts Group) files have
20 a large data size. When receiving such a large file in a poor reception condition, it may take a lot of time before the file is received completely or the file may not be received completely since reception errors often occur to different portions in the file each time the file is transmitted. However, when such a
25 large file is transmitted and received as a plurality of data

blocks in a lower layer, even if a reception error occurs, only the data block to which the reception error has occurred needs to be transmitted again. In this case, the re-transmitted data block has a rarer chance to have a reception error since its data size is small. Furthermore, it does not take much time to receive the re-transmitted data block. As a result, the number of failures in receiving files decreases, and the time taken for completely receiving such a large file is also reduced drastically.

10 However, when the broadcast data is provided in a plurality of layers, the data in the highest layer, that is to say, the data which is reproduced for use by the user cannot be reproduced until the data blocks in the lower layers are completely received. This is because the data in the highest layer is reconstructed from the data blocks in the lower layers, 15 in order from the lowest layer. That is to say, even if almost all the data blocks in a layer second to the highest layer are reconstructed, the data in the highest layer cannot be used unless the data blocks in the lower layer are completely reconstructed and the data in the highest layer is reconstructed from the data 20 blocks.

For example, in a data broadcast service with which the user can watch information such as a weather forecast or a TV program guide by tracing user files such as HTML (Hyper Text Markup Language) files linked in a tree structure, user files as

25 boughs and leaves cannot be referred to when user files as the

stem or the boughs of them cannot be reproduced. However, the possibility that the user reaches the desired information increases if information having been received normally can be reproduced immediately even if the received information is only a
5 part of a whole piece of information to be received.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a reception display apparatus and method for receiving broadcast data which is generated through a plurality of layers,
10 and being able to use the received data blocks even if all the necessary data blocks have not been received, and a computer-readable record medium recording such a reception display program.

The above object is fulfilled by a reception display
15 apparatus for receiving data blocks which are repeatedly transmitted from a broadcasting station at regular intervals and displaying a screen image based on the received data blocks, each of the data blocks including a data section, and data to be displayed as the screen image being divided into a plurality of
20 data sections, the reception display apparatus comprising: a reception means for receiving the data blocks; a data judgement means for judging whether the data section in each received data block is normal; a storage means for storing every data section judged as normal by the data judgement means without storing data

sections judged as abnormal; a condition judgement means for judging, before all data sections to be displayed as the screen image are stored in the storage means, whether a condition for displaying the screen image is satisfied; and a display means for
5 displaying, when the condition judgement means judges that the condition is satisfied, a part of the screen image using data sections currently stored in the storage means.

With the above construction, it is possible to display a screen even if all data sections necessary for the screen have
10 not been received. This enables the screen to be displayed at a point when a condition for displaying the screen is satisfied, increasing the possibility that the user reaches the desired information sooner.

In the above reception display apparatus, the data
15 judgement means may generate, when having judged that a data section is not normal, information indicating that the data section is abnormal, and stores the information into the storage means, and the display means displays either a blank or a notice indicating abnormality of the data section, at a position in the
20 screen image where the data section indicated as abnormal by the information stored in the storage means should be displayed.

With the above construction, the user can easily recognize the presence of a data section that has not been judged as normal.

25 In the above reception display apparatus, the screen

image may be either displayed at once on a screen or viewed by scrolling by a user.

With the above construction, data sections constituting whole data corresponding to a screen of a predetermined size whole
5 of which is either displayed at once or viewed by scrolling by a user are received and the screen of the predetermined size is displayed.

In the above reception display apparatus, the screen image may correspond to one of (1) a file including information
10 used for referring to another file and (2) a Hyper Text file, and the display means displays a part of the screen image using data sections of one of the file including information used for referring to another file and the Hyper Text file currently stored in the storage means.

09650029-082800
15 With the above construction, data sections constituting (1) a file including information used for referring to another file or (2) a Hyper Text file are received and the screen corresponding to the file is displayed.

In the above reception display apparatus, the condition
20 for displaying the screen image used in the judgement by the condition judgement means may be that either (1) an instruction to display has been received from a user, or (2) the reception means has received data blocks including all data sections to be displayed as the screen image.

25 With the above construction, it is possible to use data

sections currently stored when (1) an instruction to display has been received from a user, or (2) the reception means has received data blocks including all data sections constituting the whole data corresponding to the screen, This increases the possibility
5 that the user reaches the desired information sooner.

The above object is also fulfilled by a reception display apparatus for receiving data blocks which are repeatedly transmitted from a broadcasting station at regular intervals and displaying a screen image based on the received data blocks, each
10 of the data blocks including (1) a data section constituting original data to be displayed as the screen image and (2) protocol information indicating a position of the data section in the original data, the original data being divided into a plurality of data sections, the reception display apparatus comprising: a
15 reception means for receiving the data blocks; a data judgement means for judging whether the data section in each received data block is normal; a storage means for storing (1) the protocol information included in each data block received by the reception means and (2) data sections judged as normal by the data judgement
20 means, the storage means not storing data sections judged as abnormal, and each piece of stored protocol information showing correspondence to a data section from a same data block; a condition judgement means for judging, before all data sections to be displayed as the screen image are stored in the storage means,
25 whether all pieces of protocol information for the screen image

008220, 02005960

have been stored in the storage means; and a display means for, when the condition judgement means judges that all pieces of protocol information for the screen image have been stored in the storage means, displaying a part of the screen image using the data sections currently stored in the storage means and all pieces of protocol information stored in the storage means.

With the above construction, it is possible to display a screen when all pieces of protocol information necessary for the screen have been provided. This enables currently stored data sections to be used, increasing the possibility that the user reaches the desired information sooner.

In the above reception display apparatus, the data judgement means may judge whether the protocol information in each received data block is normal and then judges for each data block that includes protocol information judged as normal whether the data section in the data block is normal, and the storage means stores every piece of protocol information judged as normal.

With the above construction, each piece of protocol information is stored even if a data section in the same data block is not normal. It is possible to display a screen using only normally received data sections at a point when all pieces of protocol information necessary for displaying the screen are provided.

In the above reception display apparatus, when a data section is not stored in the storage means and a piece of protocol

information corresponding to the data section is stored in the storage means, the display means may display either a blank or a notice indicating abnormality of the data section, at a position in the screen image which is indicated by the piece of protocol
5 information.

With the above construction, the user can easily recognize the position of a data section that has been judged as abnormal.

00550020-032500
In the above reception display apparatus, each piece of
10 protocol information may indicate a display area in the screen image corresponding to a data section included in the same data block, and the display means recognizes a display area on the screen image corresponding to a data section not stored in the storage means as a non-display area, and displays in the non-
15 display area, which is indicated by a piece of protocol information corresponding to the data section not stored in the storage means, either a blank or information indicating that a data section has not been received normally.

With the above construction, the user can easily
20 recognize the range of a data section that has been judged as abnormal.

In the above reception display apparatus, each piece of protocol information may further indicate a data size of a data section included in the same data block, and the display means
25 generates a non-display area at a position in the screen image

where a data section not stored in the storage means should be displayed, the non-display area having a size equivalent to a data size of the data section not stored in the storage means, and the data size and the position being indicated by a piece of protocol information stored in the storage means and corresponding to the data section not stored in the storage means.

With the above construction, it is possible to set the size of the non-display area in proportionate to the data size of the data section. This enables the user to easily estimate the size of the abnormal data from the size of the non-display area, and to update without a sense of incongruity the non-display area to a normal data section when it is received later.

In the above reception display apparatus, the received data blocks may belong to a lowest layer of a plurality of layers, the data blocks in the lowest layer being generated through the plurality of layers from the original data in a highest layer so that each data block in each layer includes (1) a data section which constitutes a data block in a next-higher layer and (2) a piece of protocol information which indicates a position of the data section included in the same data block, the highest layer not including protocol information but consisting of the original data which corresponds to the screen image, the receiving means receives each data block in the lowest layer, the data judgement means judges whether the data section in each received data block is normal, the storage means stores (1) the protocol information

09650029-082800

included in each data block received by the reception means and
(2) every data section judged as normal by the data judgement
means, the condition judgement means judges, before all data
sections constituting a data block in a second-lowest layer are
5 stored in the storage means, whether all pieces of protocol
information necessary for the data block in the second-lowest
layer have been stored in the storage means, when having judged
so, reconstructs the data block in the second-lowest layer by
using data sections in the lowest layer currently stored in the
10 storage means and all corresponding pieces of protocol information
in the lowest layer stored in the storage means, repeats such a
reconstruction of a data block until the condition judgement means
judges, before all data sections constituting the original data in
the highest layer are reconstructed, that all pieces of protocol
15 information necessary for reconstructing the original data in the
highest layer have been prepared, and at this point of time, the
display means displays a part of the screen image using the data
sections in the second-highest layer having been reconstructed so
far and the all pieces of protocol information in the second-
20 highest layer necessary for reconstructing the original data in
the highest layer.

With the above construction, it is possible to display
a screen by reconstructing the original data through generation of
a plurality of layers from the received data blocks.

25 The above object is fulfilled by a reception display

000220.622000

method for receiving data blocks which are repeatedly transmitted from a broadcasting station at regular intervals and displaying a screen image based on the received data blocks, each of the data blocks including a data section, and data to be displayed as the screen image being divided into a plurality of data sections, the reception display method comprising: a reception step for receiving the data blocks; a data judgement step for judging whether the data section in each received data block is normal; a storage step for storing every data section judged as normal in the data judgement step without storing data sections judged as abnormal; a condition judgement step for judging, before all data sections to be displayed as the screen image are stored, whether a condition for displaying the screen image is satisfied; and a display step for, when the condition judgement step judges that the condition is satisfied, displaying a part of the screen image using currently stored data sections.

In the above reception display method, the data judgement step may generate, when having judged that a data section is not normal, information indicating that the data section is abnormal, and stores the information, and the display step displays either a blank or a notice indicating abnormality of the data section, at a position in the screen image where the data section indicated as abnormal by the stored information should be displayed.

The above object is also fulfilled by a reception

display method for receiving data blocks which are repeatedly transmitted from a broadcasting station at regular intervals and displaying a screen image based on the received data blocks, each of the data blocks including (1) a data section constituting
5 original data to be displayed as the screen image and (2) protocol information indicating a position of the data section in the original data, the original data being divided into a plurality of data sections, the reception display method comprising: a reception step for receiving the data blocks; a data judgement
10 step for judging whether the data section in each received data block is normal; a storage step for storing (1) the protocol information included in each data block received in the reception step and (2) data sections judged as normal in the data judgement step, the storage step not storing data sections judged as
15 abnormal, and each piece of stored protocol information showing correspondence to a data section from a same data block; a condition judgement step for judging, before all data sections to be displayed as the screen image are stored, whether all pieces of protocol information for the screen image have been stored; and a
20 display step for, when the condition judgement step judges that all pieces of protocol information for the screen image have been stored, displaying a part of the screen image using the currently stored data sections and all pieces of stored protocol information.

25 The above object is also fulfilled by a computer-

00000000.00000000

The above object is also fulfilled by a computer-readable record medium recording a reception display program for receiving data blocks which are repeatedly transmitted from a broadcasting station at regular intervals and displaying a screen image based on the received data blocks, each of the data blocks including (1) a data section constituting original data to be displayed as the screen image and (2) protocol information indicating a position of the data section in the original data, the original data being divided into a plurality of data sections, the reception display program causing a computer to execute: a reception step for receiving the data blocks; a data judgement step for judging whether the data section in each received data block is normal; a storage step for storing (1) the protocol information included in each data block received in the reception step and (2) data sections judged as normal in the data judgement step, the storage step not storing data sections judged as abnormal, and each piece of stored protocol information showing correspondence to a data section from a same data block; a condition judgement step for judging, before all data sections to be displayed as the screen image are stored, whether all pieces of protocol information for the screen image have been stored; and a display step for, when the condition judgement step judges that all pieces of protocol information for the screen image have been stored, displaying a part of the screen image using the currently stored data sections and all pieces of stored protocol

information.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, advantages and features of the invention will become apparent from the following description thereof taken in conjunction with the accompanying drawings which illustrate a specific embodiment of the invention. In the drawings:

FIG. 1 shows the construction of the broadcast data reception apparatus which receives broadcast data and uses the received broadcast data;

FIG. 2 shows a detailed construction of the broadcast data management system 130 shown in FIG. 1;

FIG. 3 shows the construction of the management information managed by the broadcast data management system 130 shown in FIG. 1;

FIG. 4 shows the file management information;

FIG. 5 shows the block management information;

FIG. 6 shows a data reception of a file;

FIG. 7 shows the file management information and the block management information of the lowest layer which are generated and updated when data is received in the order shown in FIG. 6;

FIG. 8 shows the file management information and the block management information of the lowest layer which are

generated and updated when data is received in the order shown in
FIG. 6;

FIG. 9 shows the file management information and the
block management information of the lowest layer which are
5 generated and updated when data is received in the order shown in
FIG. 6;

FIG. 10 shows the file management information and the
block management information of the lowest layer which are
generated and updated when data is received in the order shown in
10 FIG. 6;

FIG. 11 shows the file management information and the
block management information of the lowest layer which are
generated and updated when data is received in the order shown in
FIG. 6;

FIG. 12 shows the file management information and the
block management information of the lowest layer which are
generated and updated when data is received in the order shown in
15 FIG. 6;

FIG. 13 shows the file management information and the
20 block management information of the lowest layer which are
generated and updated when data is received in the order shown in
FIG. 6;

FIG. 14 shows a transfer of the broadcast data from the
lower layer to the higher layer;

25 FIG. 15 shows the reconstruction and decoding of data

00650029.082870

blocks in layer 2;

FIG. 16 shows the block management information for managing data blocks in layer 2;

FIG. 17A shows a positional relationship between the effective block offset and the effective block size in data block 1401 in layer 1;

FIG. 17B shows a positional relationship between the effective block offset and the effective block size in data block 1404 in layer 1;

FIG. 18 shows that the management information shown in FIG. 13 is arranged to further include the target serial number, effective block offset, and effective block size shown in FIG. 16 to manage the data block 1411 in layer 2;

FIG. 19 shows detailed reconstruction and decoding of data blocks in layer 2;

FIG. 20 shows that the management information shown in FIG. 10 is arranged to further include the target serial number, effective block offset, and effective block size shown in FIG. 16 to manage the data block 1411 in layer 2;

FIG. 21 shows an HTML file sent by a general data broadcast service;

FIG. 22 shows the complete HTML file 2101 shown in FIG. 21 displayed by the broadcast data viewer of the present invention;

FIG. 23 shows the HTML file shown in FIG. 21 displayed

by the broadcast data viewer of the present invention excluding a part 2102 of the HTML file which has not been stored in the data storage unit 140 due to a reception error of the part 2102;

FIG. 24 shows a format of an image file;

5 FIG. 25 shows an image file for overlaying a plurality of images with the transparent background;

FIG. 26A shows a display on the screen when all data in the image file shown in FIG. 25 has been stored after the reception error 2504 in the image file shown in FIG. 25 has been
10 received without an error by a re-reception or the like and updated;

FIG. 26B shows a display on the screen when the reception error 2504 in the image file has not been stored;

FIG. 27 shows the file block notification information
15 which is returned, prior to the file block information, in response to a request to refer to the file block information sent from a protocol decoder or a broadcast data viewer to the broadcast data management system in the present embodiment;

FIG. 28 shows the file block notification information
20 obtained from the management information shown in FIG. 10;

FIG. 29 shows four examples of the file block notification information;

FIG. 30 shows the file management information;

FIG. 31 shows calculated results of the minimum block
25 size, maximum block size, average block size, etc.;

FIG. 32 shows an HTML file displayed by the broadcast data viewer of the present invention, where all the data blocks necessary for the HTML file have been received normally;

FIG. 33 shows an HTML file displayed by the broadcast
5 data viewer of the present invention, where a data section of the HTML file has not been stored due to a reception error or the like and the data size of the not-stored part is unknown, the not-stored part not being displayed;

FIG. 34 shows an HTML file displayed by the broadcast
10 data viewer of the present invention, where a data section of the HTML file has not been stored due to a reception error or the like and the data size of the not-stored part is unknown, the not-stored part not being displayed;

FIG. 35 shows the internal construction of a broadcast
15 data viewer 150 of the present invention;

FIG. 36 shows a process in which the transmission side generates data blocks in a plurality of lower layers from a data block in a higher layer; and

FIG. 37 shows a process in which the reception side
20 generates a data block in a higher layer from data blocks in a plurality of lower layers.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following are description of the present invention through specific embodiments thereof by way of referring to the

drawings.

<Embodiment 1>

0650029-022800

The broadcast data reception apparatus in Embodiment 1 of the present invention reconstructs data blocks in higher layers, though not completely normally, using only normally received data in the data blocks in lower layers even if some data in data blocks in the lowest layer (excluding the protocol information) has not been received normally. That is to say, at a point in time when all the protocol information necessary for reconstructing a data block in the higher layer has been received and stored, the data block is reconstructed using only normally received data in the data blocks in the lower layer.

<Broadcast Data Reception Apparatus>

FIG. 1 shows the construction of the broadcast data reception apparatus which receives broadcast data and uses the received broadcast data.

The broadcast data reception apparatus 100 shown in FIG. 1 includes a reception unit 110, a layer-1 protocol decoder 121 to a layer-N protocol decoder 12N (where N is an integer of 2 or greater), a broadcast data management system 130, a data storage unit 140, and a broadcast data viewer 150.

The layer-1 protocol decoder 121 includes a protocol reconstruction unit 121a, an information notification unit 121b, and an information management unit 121c.

Similarly, a layer-2 protocol decoder 122 to the layer-N

09550029-032800

protocol decoder 12N include a protocol reconstruction unit 122a to a protocol reconstruction unit 12Na, an information notification unit 122b to an information notification unit 12Nb, and an information management unit 122c to an information management unit 12Nc, respectively.

The reception unit 110 receives a broadcast signal via an antenna or the like, performs an error correction and decoding of the received broadcast signal, outputs data blocks in the lowest layer necessary for reconstructing broadcast data to the broadcast data management system 130 sequentially, and sends notifications of the above output of the data blocks to the protocol reconstruction unit 121a in the layer-1 protocol decoder 121 sequentially. In doing this, when the data part ("real data") of a data block in the lowest layer to be output to the broadcast data management system 130 is destroyed so hard due to a reception error or the like that an error correction cannot amend the defect, information indicating the defect instead of normal data and protocol information are output to the broadcast data management system 130. At this point in time, the normal data has not been received. Data blocks in the lowest layer failed to be received normally are received repeatedly until they are received normally. Normally received data blocks are output after they are received. Here, it is presumed that each piece of the protocol information is normal and is received normally and that it is judged so.

03550023-032500

The layer-1 protocol decoder 121 reconstructs and decodes the protocol in accordance with the protocol of layer 1, the lowest layer, and generates first offset information used for reconstructing data blocks in layer 2 from a plurality of data blocks in the lowest layer, and sends the generated first offset information to the layer-2 protocol decoder 122 and the broadcast data management system 130.

The protocol reconstruction unit 121a, each time it receives a notification from the reception unit 110, judges whether enough data blocks in layer 1 to reconstruct a data block in layer 2 for reproducing desired broadcast data have been received. When having judged affirmatively, the protocol reconstruction unit 121a instructs the information management unit 121c to extract the protocol information which is necessary for reconstructing this data block in layer 2 from the data blocks in layer 1. The protocol reconstruction unit 121a previously preserves a protocol of layer 1 used for reconstructing the data blocks in layer 2. When instructing the information management unit 121c to extract the protocol information, the protocol reconstruction unit 121a attaches to the instruction a relative address of the protocol information to be extracted for the data blocks in layer 1, based on the previously preserved protocol.

Upon reception of the instruction from the protocol reconstruction unit 121a, the information management unit 121c instructs the broadcast data management system 130 to extract

protocol information in each specified data block in layer 1, and sends each piece of the extracted protocol information to the protocol reconstruction unit 121a.

Upon receipt of the protocol information, the protocol reconstruction unit 121a based on the received protocol information generates the first offset information used to temporarily reconstruct the data block in layer 2 judged affirmatively, and sends the generated first offset information to the information notification unit 121b. The first offset information is also sent to the broadcast data management system 130 via the information management unit 121c. Here, the first offset information is composed of (1) information specifying a plurality of data blocks in layer 1 constituting the data block in layer 2 judged affirmatively and (2) information of relative addresses indicating the necessary data parts of the plurality of data blocks in layer 1.

Upon receipt of the first offset information from the protocol reconstruction unit 121a, the information notification unit 121b sends notifications sequentially to the protocol reconstruction unit 122a of the protocol decoder 122 in layer 2.

The layer-2 protocol decoder 122 to the layer-N protocol decoder 12N reconstruct and decode the protocols in accordance with the protocols of layer 2 to layer N, and generate second offset information to N^{th} offset information used for reconstructing data blocks in layer 2 to layer N from a plurality

The broadcast data viewer 150 displays broadcast data automatically or based on an instruction from the user so that the user can refer to it.

<Broadcast Data Management System>

5 FIG. 2 shows a detailed construction of the broadcast data management system 130 shown in FIG. 1. Note that FIG. 2 also shows the data storage unit 140 shown in FIG. 1.

 A file creating unit 201 receives a file creation request from the reception unit 110, instructs a file management
10 information generating unit 207 to generate file management information and store the generated file management information in the data storage unit 140, and generates a file.

 A file open unit 202 receives a file-open request from the information management unit 122c to the information management
15 unit 12Nc, instructs a file management information retrieval unit 208 to retrieve file management information corresponding to a file to be opened in the data storage unit 140, and opens the existent file to be opened for use, based on the retrieved file management information.

20 A file close unit 203 receives a file-close request from the reception unit 110 and the information management unit 122c to the information management unit 12Nc, instructs a file management information update unit 209 to update file management information corresponding to a file to be closed in the data storage unit 140,
25 and closes the file to be closed so that it cannot be used.

09650029-082830

A normal writing control unit 204 receives a normal write request from the information management unit 12Nc, where the normal write request is issued when a piece of normally received data is registered with a file. The normal writing control unit 5 204 then instructs a block management information reconstruction unit 212 to obtain (1) a position where the normal data is to be written and (2) the size of the normal data, instructs a real block management information generating unit 210 to generate block management information for the normal data, and instructs a data 10 writing unit 213 to write the normal data to the data storage unit 140.

An abnormal writing control unit 205 receives an abnormal write request from the information management unit 122c to the information management unit 12Nc, where the abnormal write 15 request is issued when a piece of received data with a reception error is registered with a file. The abnormal writing control unit 205 then instructs the block management information reconstruction unit 212 to obtain (1) a position where the data is to be written when no reception error occurs and (2) the size of 20 the data, and instructs a temporary block management information generating unit 211 to generate block management information for the abnormal data.

A reading control unit 206 receives a read request from the broadcast data viewer 150, where the read request is issued 25 when data is read from a file. The reading control unit 206 then

instructs a block management information reconstruction unit 212 to obtain (1) a position of the data to be read and (2) the size of the data to be read, and instructs a data reading unit 214 to read from the data storage unit 140.

5 <Construction of Management Information>

FIG. 3 shows the construction of the management information managed by the broadcast data management system 130 shown in FIG. 1.

10 The management information shown in FIG. 3 is divided into a file management information area, a block management information area, and a data block area.

The file management information area includes a plurality of pieces of file management information which correspond to a plurality of files on a one-to-one basis.

15 The block management information area includes a plurality of pieces of block management information which correspond to a plurality of blocks on a one-to-one basis.

The data block area includes a plurality of data blocks.

20 Information of one file includes one piece of file management information, n pieces of block management information, and m data blocks, where n is a number being "1" or greater, and m is a number being n or greater.

FIG. 4 shows the file management information.

25 FIG. 5 shows the block management information.

start data block among the stored ones.

The end serial number 507 is a serial number of the end data block among the stored ones.

Here, it is supposed that the serial numbers are updated
5 in an ascending order, and that the block management information includes index information which shows all portions of the data block, except the protocol information, corresponding to all the serial numbers (from the start serial number 506 to the end serial number 507). It should be noted here that the serial numbers may
10 take any form as far as they indicate uniquely the data blocks, and that the form may be determined for each data broadcast system.

The one or more data indexes 508 each store an index that shows the really received data. The one or more data indexes
15 508 may be information arbitrarily determined for each data broadcast system, such as addresses of the data blocks or identification numbers when the data blocks have fixed lengths. The number of data indexes is also arbitrary. The number of really registered data blocks can be obtained from the number of
20 stored pieces of data 504.

<Generation and Update of Management Information>

The following is a description of generation and update of the information constituting a file.

FIG. 6 shows a data reception of a file.

25 FIGS. 7 to 14 show the file management information and

FIG. 7 shows each piece of management information generated in the above conditions.

To generate the new piece of file management information, an unused area for one piece of the file management information 700 is detected and secured (FIG. 7), the use flag 701 is set to "used", the reception file ID 703 is set to the file identification number "0" based on the protocol, and the file size 704 and the stored file size 705 are set to the size of the received data blocks.

10 To register the first data block, an unused area for one piece of the block management information 710 is secured (FIG. 7), the use flag 712 is set to "used", the block type 713 is set to "real data", the number of stored pieces of data 714 to "1", the block size 715 is set to "S1", and the start serial number 716 and
15 the end serial number 717 are set to "0". The block management information identifier 702 of the file management information 700 is set to the identifier of the block management information 710, and the first data index 718a of the block management information 710 is set to the index information indicating the received data
20 block 601 excluding the protocol information (FIG. 7).

(2) Secondly, when the data block 602 is received normally without an error, the block management information is registered and data of the data block 602 is stored.

FIG. 8 shows each piece of management information
25 generated in the above conditions.

The block management information is updated as follows.

First, the position where the index information indicating the received data block 602 excluding the protocol information is to be registered is determined from the serial number. In this

5 example, the file management information 700 including the reception file ID 703 that matches the obtained file identification number "0" is detected. The block management information 710 (FIG. 7) is then detected by referring to the block management information identifier 702 of this file

10 management information 700 (FIG. 7). The start serial number 716 and the end serial number 717 of the block management information 710 are "0". The serial number of the received data block 602 is "1". It is found from these numbers that the index information indicating the received data block 602 excluding the protocol

15 information is positioned next to the block management information 710. Since the block management information 710 does not include the next information identifier 711, it is found that it is addition, not update. It is then found that the position for the addition is the block management information 710 from the fact

20 that the block type 713 of the block management information 710 is "real data" and it is the registration of a normally received block. Therefore, the number of stored pieces of data 714 is incremented from "1" to "2", the block size is increased by "S2" to "S1+S2", and the end serial number 717 is updated from "0" to "1".

25 The index information indicating the data block 602 excluding the

protocol information is added to the second data index 718b. The file size 704 and the stored file size 705 in the file management information 700 are increased by "S2" to "S1+S2" (FIG. 7 is updated to FIG. 8).

- 5 (3) Thirdly, when the data block 603 is received with an error, the block management information is registered and data of the data block 603 is not stored.

FIG. 9 shows each piece of management information generated in the above conditions.

- 10 The block management information is updated as follows. First, as with the case of the registration of a normally received data block, the position where the index information indicating the data block 602 excluding the protocol information were to be registered if the data block 603 had been received normally is
- 15 determined from the serial number. In this example, the file management information 700 including the reception file ID 703 that matches the obtained file identification number "0" is detected. The block management information 710 (FIG. 8) is then detected by referring to the block management information
- 20 identifier 702 of this file management information 700 (FIG. 8). The start serial number 716 of the block management information 710 is "0". The end serial number 717 is "1". The serial number of the received data block 603 is "2". It is found from these numbers that the index information indicating the received data
- 25 block 603 excluding the protocol information is positioned next to

09650029.082800

the block management information 710. Since the block management information 710 does not include the next information identifier 711, it is found that it is addition, not update. It is then found that the position for the addition is the block management information 710 from the fact that the block type 713 of the block management information 710 is "real data". Therefore, an unused area for one piece of the block management information 710 is secured (FIG. 9), the use flag 722 is set to "used", the block type 723 is set to "temporary data", the number of stored pieces of data 714 to "1", the block size 725 is set to "S3", and the start serial number 726 and the end serial number 727 are set to "2" (FIG. 9). The next information identifier 711 of the block management information 710 is set to the identifier of this block management information 720. The file size 704 of the file management information 700 is increased by "S3" to "S1+S2+S3" from "S1+S2" (FIG. 8 is updated to FIG. 9).

(4) Fourthly, when the data block 604 is received normally without an error, the block management information is registered and data of the data block 604 is stored.

FIG. 10 shows each piece of management information generated in the above conditions.

The block management information is updated as follows. First, the position where the index information indicating the received data block 604 excluding the protocol information is to be registered is determined from the serial number. In this

example, the file management information 700 including the reception file ID 703 that matches the obtained file identification number "0" is detected. The block management information 710 (FIG. 9) is then detected by referring to the

5 block management information identifier 702 of this file management information 700 (FIG. 9). The start serial number 716 of the block management information 710 is "0". The end serial number 717 is "1". The serial number of the received data block 602 is "1". It is found from these numbers that the index

10 information indicating the received data block 602 excluding the protocol information is positioned next to the block management information 710. The next information identifier 711 of the block management information 710 is referred to to detect the block management information 720 (FIG. 9). The start serial number 726

15 and the end serial number 727 of the block management information 720 are "2". The serial number of the received data block 604 is "3". It is found from these numbers that the index information indicating the received data block 604 excluding the protocol information is positioned next to the block management information

20 720. Since the block management information 720 does not include the next information identifier 721, it is found that it is addition, not update. It is then found that the position for the addition is a new piece of block management information other than the block management information 720 from the fact that the block

25 type 723 of the block management information 720 is "temporary

(7) Seventhly, the data block 607 is received normally. The management information is updated and the data of the data block 607 is stored.

FIG. 11 shows the management information generated in
5 the above conditions.

The block management information is updated as follows.
First, the position where the index information indicating the received data block 607 excluding the protocol information is to be registered is determined from the serial number. In this
10 example, the file management information 700 including the reception file ID 703 that matches the obtained file identification number "0" is detected. The block management information 710 (FIG. 10) is then detected by referring to the block management information identifier 702 of this file
15 management information 700 (FIG. 10). The start serial number 716 of the block management information 710 is "0". The end serial number 717 is "1". The serial number of the received data block 607 is "2". It is found from these numbers that the index information indicating the received data block 607 excluding the
20 protocol information is positioned next to the block management information 710. The next information identifier 711 of the block management information 710 is referred to to detect the block management information 720 (FIG. 10). The start serial number 726 and the end serial number 727 of the block management information
25 720 are "2". The serial number of the received data block 607 is

09650029.082800

block type 723 of the block management information 720 (FIG. 11) are both "real data" and since the end serial number 717 of the block management information 710 is "1" and the start serial number 726 of the block management information 720 is "2", indicating they are successive. As a result, the number of stored pieces of data 714 of the block management information 710 is updated from "2" to "3" by adding "1" in the number of stored pieces of data 724 of the block management information 720. The block size 715 of the block management information 710 is updated from "S1+S2" to "S1+S2+S3" by adding "S3" in the block size 725 of the block management information 720. The end serial number 717 of the block management information 710 is replaced by the end serial number 727 of the block management information 720, "2". The data index 718c is generated by adding information of the data index 728 of the block management information 720 to the data index 718b of the block management information 710 (FIG. 11 is updated to FIG. 12).

(9) The block management information is further combined with the subsequent pieces of block management information.

FIG. 13 shows the management information in the above conditions.

In this combination, first, it is judged whether the block management information 720 whose block type 723 has been updated can be combined with the next block management information 730. However, as described in (8) above, the block management

0965029.082600

information 720 has been combined with the block management information 710. Therefore, it is judged whether the block management information 710 can be combined with the block management information 730. In this example, it is judged that

5 the block management information 730 and 710 can be combined since the block type 713 of the block management information 710 (FIG. 12) and the block type 723 of the block management information 730 (FIG. 12) are both "real data" and since the end serial number 717 of the block management information 710 is "2" and the start serial

10 number 736 of the block management information 730 is "3", indicating they are successive. As a result, the number of stored pieces of data 714 of the block management information 710 is updated from "3" to "4" by adding "1" in the number of stored pieces of data 734 of the block management information 730. The

15 block size 715 of the block management information 710 is updated from "S1+S2+S3" to "S1+S2+S3+S4" by adding "S4" in the block size 735 of the block management information 730. The end serial number 717 of the block management information 710 is replaced by the end serial number 737 of the block management information 730,

20 "3". The data index 718d is generated by adding information of the data index 738 of the block management information 730 to the data index 718c of the block management information 710 (FIG. 12 is updated to FIG. 13).

Up to this point, the data blocks A to D have been

25 received completely.

00000000-00000000

(10) The data block 608 is received normally. The management information, however, is not updated since the data block 604 having the same contents as the data block 608 has been received normally.

5 The process is not detailed here since it is the same as (5) above.

As described above, when a reception error occurs while data blocks with the protocol information are sequentially transmitted, only the data block to which the reception error has
10 occurred is received again. This arrangement reduces the time taken for receiving file.

In this embodiment, a plurality of pieces of block management information whose block type indicates "real data" are combined together. Though it is possible to combine a plurality
15 of pieces of block management information whose block type indicates "temporary data", it is not necessary.

<Reconstruction and Decoding of Higher Layers>

The following is a description of the reconstruction and decoding of higher layers supposing that all the data blocks of
20 the lower layer necessary for reconstructing the higher layers have been received.

FIG. 14 shows a transfer of the broadcast data from the lower layer to the higher layer.

The data block 1401 shown in FIG. 14 includes a protocol
25 header 1401a, a protocol-included data 1401b, and a protocol

00650029.082800

protocol header 1401a and the protocol footer 1401c of the data block 1401 in layer 1 become unnecessary. Similarly, after the data block 1421 in layer 3 is reproduced, the protocol header 1411a and the protocol footer 1411c of the data block 1411 in layer 2 become unnecessary. Such relationships apply to any pair of a higher layer and a lower layer.

The block management information for managing the above will be defined as follows.

FIG. 16 shows the block management information for managing data blocks in layer 2.

The block management information shown in FIG. 16 includes, as well as the contents of the block management information shown in FIG. 5, a target serial number 1601 indicating a serial number of a target data block and being used for identifying the target data block, an effective block offset 1602 indicating a size of data put before effective data, and an effective block size 1603 indicating a size of the effective data. Note that the target serial number 1601, effective block offset 1602, and effective block size 1603 are equivalent to the first offset information to the N^{th} offset information, and are generated by the layer-1 protocol decoder 121 to the layer-N protocol decoder 12N.

FIG. 17A shows a positional relationship between the effective block offset and the effective block size in data block 1401 in layer 1. FIG. 17B shows a positional relationship between

the effective block offset and the effective block size in data block 1404 in layer 1.

In FIGs. 17A and 17B, the effective block offset and the effective block size of the data block 1401 are represented as "S1o" and "S1s", respectively, and the effective block offset and the effective block size of the data block 1404 are represented as "S4o" and "S4s", respectively.

FIG. 18 shows that the management information shown in FIG. 13 is arranged to further include the target serial number, effective block offset, and effective block size shown in FIG. 16 to manage the data block 1411 in layer 2. In FIG. 18, the data size of the portion excluding the protocol information of the data blocks 1401 to 1403 is represented as "S1" to "S4", respectively.

The two target data blocks are registered with the block management information 710. As a result, as shown in FIG. 18, the target serial number 1801a is set to "0" being the serial number of the data block 1401, the effective block offset 1802a is set to "S1o" being the effective block offset of the data block 1401, the effective block size 1803a is set to "S1s" being the effective block size of the data block 1401, the target serial number 1801b is set to "3" being the serial number of the data block 1404, the effective block offset 1802b is set to "S4o" being the effective block offset of the data block 1404, and the effective block size 1803b is set to "S4s" being the effective block size of the data block 1404.

Data blocks in layer 3 and higher layers are then reconstructed and decoded.

In this way, up to data blocks in the highest layer are reconstructed and decoded.

5 As described above, in reconstruction and decoding of the data blocks in a higher layer, data is not copied, but information specifying each data section constituting the higher layer is added. With this arrangement, the data blocks in layer 1 are first stored and used as portions of the data blocks in the
10 higher layers. This provides an effective file management.

Now, reconstruction and decoding of the data blocks in a higher layer when all the data blocks in a lower layer necessary for reconstructing data blocks in the higher layer have not been received normally due to a reception error.

15 In this example, reconstruction of a higher layer is started immediately after the data blocks 1401 to 1404 are received normally except the data block 1403 which is received with an error.

FIG. 19 shows detailed reconstruction and decoding of
20 data blocks in layer 2. The components in FIG. 19 having the same reference numbers as FIG. 15 are the same as those in FIG. 15.

FIG. 19 differs from FIG. 15 in that data portion of the data block 1403 has not been stored in the data storage unit 140 due to a reception error having occurred to the protocol-included
25 data 1403b in the data block 1403.

As shown in FIG. 19, that the protocol-included data 1403b has not been stored means that the corresponding data 1901 in the data block 1411 in layer 2 has not been stored at this point in time. However, since the data 1901 does not include data in the protocol header 1411a and the protocol footer 1411c, reconstruction and decoding of the data blocks in layer 3 are executed without trouble.

FIG. 20 shows that the management information shown in FIG. 10 is arranged to further include the target serial number, effective block offset, and effective block size shown in FIG. 16 to manage the data block 1411 in layer 2. In FIG. 20, the data size of the portion excluding the protocol information of the data blocks 1401 to 1403 is represented as "S1" to "S4", respectively.

As shown in FIG. 20, since the target data block 1401 is registered with the block management information 710, the target serial number 2001a is set to "0" being the serial number of the data block 1401, the effective block offset 2002a is set to "S1o" being the effective block offset of the data block 1401, the effective block size 2003a is set to "S1s" being the effective block size of the data block 1401. Since the target data block 1404 is registered with the block management information 730, the target serial number 2001b is set to "3" being the serial number of the data block 1404, the effective block offset 2002b is set to "S4o" being the effective block offset of the data block 1404, and the effective block size 2003b is set to "S4s" being the effective

block size of the data block 1404.

Reconstruction and decoding of data blocks in higher layers are executed, as is the case with data blocks in layer 3, as far as the portion to which a reception error has occurred does
5 not include data in the protocol header or the protocol footer in any layer.

As understood from above, even if a reception error occurs to the data in a data block, data blocks in up to the highest layer are reconstructed and decoded as far as the data
10 portion to which the reception error has occurred is not the protocol information in any layer.

As described above, in reconstruction and decoding of the data blocks in a higher layer, even if data is not received normally, information specifying each data section constituting
15 the higher layer is added, and the data blocks in the lowest layer can be used as parts of the data blocks in the higher layer. With this arrangement, reconstruction and decoding of the data blocks in the higher layer are executed before all the data blocks constituting the higher layer are received normally. As a result,
20 it is possible to use data including a defective data block. Later, when the defective part is received normally, the corresponding part in the higher layer can be updated. This provides an effective file management.

<Reference to Data>

25 The following is a description of a case where a data

section is referred to. In this example, it is supposed that layer 3 is the highest layer, and that a part of the data block 1421 in the highest layer corresponding to the data block 1411 is referred to.

5 The first case to be described is based on the premise that data blocks in the lowest layer constituting the data blocks 1411 to 1413 have all been received normally, that is, all necessary file data has been received.

FIG. 18 shows the management information of the data
10 block 1411 in the above point in time.

In this example, the following are performed based on the protocol of the highest layer. The file management information 700 (FIG. 20) including data requested to be referred to is detected. The block management information 710 (FIG. 20) is
15 then detected by referring to the block management information identifier 702 of the file management information 700. The data part of the data block 1421 corresponding to the data blocks 1401 to 1402 is obtained from the data indexes 718a to 718b, the target serial number 2001a "0", the effective block offset 2002a "S1o", and
20 the effective block size 2003a "S1s" in the block management information 710. The block management information 720 (FIG. 20) is then detected by referring to the next information identifier 711 of the block management information 710. The size of the data not having been received is obtained from the block size 725 "S3"
25 in the block management information 720. The block management

information 730 (FIG. 20) is detected by referring to the next information identifier 721 of the block management information 720. The data part of the data block 1421 corresponding to the data block 1404 is obtained from the data indexes 738, the target
5 serial number 2001b "3", the effective block offset 2002b "S4o", and the effective block size 2003b "S4s" in the block management information 730.

Now, how data is used when all file data has not been received due to a reception error of the data block 1403 will be
10 described.

FIG. 21 shows an HTML file sent by a general data broadcast service.

FIG. 22 shows the complete HTML file 2101 shown in FIG. 21 displayed by the broadcast data viewer of the present
15 invention. FIG. 23 shows the HTML file shown in FIG. 21 displayed by the broadcast data viewer of the present invention excluding a part 2102 of the HTML file which has not been stored in the data storage unit 140 due to a reception error of the part 2102.

In accordance with the broadcast data management system
20 in the present embodiment, when the broadcast data viewer of the present invention displays an HTML file not having in part been stored, the position where the not-stored part is to be displayed can be detected from the management information without difficulty. As a result, it is possible to display a blank at the
25 position or to display a comment such as "not received" as shown

FIG. 26A shows a display on the screen when all data in the image file shown in FIG. 25 has been stored after the reception error 2504 in the image file shown in FIG. 25 has been received without an error by a re-reception or the like and updated. FIG. 26B shows a display on the screen when the reception error 2504 in the image file has not been stored.

It is supposed in FIG. 25 that three images are stored. The image block 2501 corresponds to the rhombus 2601 in FIG. 26A, the image block 2502 corresponds to the triangle 2602 in FIG. 26A, and the image block 2503 corresponds to the circle 2603 in FIG. 26A.

As shown in FIG. 26B, the rhombus 2601 is displayed normally since the image block 2501 has all the data. A part in the shape 2604 is missing since the image block 2502 lacks some data due to the reception error 2504. The circle 2603 is displayed normally since the image block 2503 has all the data. As apparent from this, the present embodiment detects the position and data size of the reception error 2504, and can read the subsequent data excluding the data part corresponding to the reception error 2504.

When a part of data has not been stored when a plurality of images with different resolutions are to be stored in the order of the resolution and displayed in the order of reception, or a plurality of images are to be displayed in succession as an animated picture, a blank is displayed in correspondence to the

has occurred and the protocol information has not been received or
(2) the data has not been received.

The detailed information counter 2704 indicates the number of pieces of block information 2705.

5 The plurality of pieces of block information 2705 each correspond to a data block, and include a block information type 2706 and a block information size 2707.

10 The block information type 2706 indicates whether the block information of a corresponding data block is real data or temporary data.

 The block information size 2707 indicates the data size of the block information of a corresponding data block, and is "0" when the data size is unknown.

15 The file block notification information 2700 shown in FIG. 27 is obtained from the file management information and the block management information shown in FIGs. 3 to 5.

 FIG. 28 shows the file block notification information obtained from the management information shown in FIG. 10. A detailed description will be provided as follows with reference to
20 FIGs. 10 and 28.

 The received total size 2801 is " $S1+S2+S4$ " which is obtained from the stored file size 705 in the file management information 700.

25 The received error total size 2802 is " $S3$ " which is obtained from the block size 725 in the block management

information 720 since only the block management information 720 among the block management information 710 to 730 is related to the temporary data.

5 The unknown size block counter 2803 is "0" since there is no block management information for temporary data of unknown size among the block management information 710 to 730.

 The block information type 2805 shows a flag value of "real data" which is obtained from the block type 713 in the start block management information 710.

10 The block information size 2806 is "S1+S2" which is obtained from the block size 715 in the start block management information 710.

15 The block information type 2807 shows a flag value of "temporary data" which is obtained from the block type 723 in the second block management information 720.

 The block information size 2808 is "S3" which is obtained from the block size 725 in the second block management information 720.

20 The block information type 2809 shows a flag value of "real data" which is obtained from the block type 733 in the third block management information 730.

 The block information size 2810 is "S4" which is obtained from the block size 735 in the third block management information 730.

25 Lastly, the detailed information counter 2804 is "3"

which is the number of pieces of block information currently stored.

FIG. 29 shows four examples of the file block notification information.

5 Now, whether referring to a file is possible will be described with reference to FIG. 29. Note that in this example, it is judged that a file can be referred to when (1) the received total size is twice the received error total size or larger, and (2) the unknown size block counter is "0", and (3) half or more
10 data blocks have been received normally.

 In the case of the first example shown in FIG. 29, the received total size is "400" which is eight times the received error total size "50". This indicates that enough data to refer to a file has been received since the value is well over the
15 threshold, "twice". In addition, the unknown size block counter is "0" and there are only two temporary data blocks. It is judged from these conditions that a file can be referred to.

 In the case of the second example shown in FIG. 29, the received total size is "40" which is far smaller than the received
20 error total size "300", and is not enough to refer to a file. Therefore, it is judged that a file cannot be referred to.

 In the case of the third example shown in FIG. 29, the received total size is "400" which is well larger than the received error total size "0" and is well over the threshold, "twice". It
25 appears from this that enough data has been received to refer to

00000000.00000000

a file. However, the unknown size block counter is "3" and the detailed information counter is "4". This indicates that reception errors have occurred to 3/4 blocks. Also, the unknown size block counter is not "0" and half or more blocks have not been received without an error. Therefore, it is judged that a file cannot be referred to.

In the case of the fourth example shown in FIG. 29, the received total size is "400" which is eight times the received error total size "50". This indicates that enough data to refer to a file has been received since the value is well over the threshold, "twice". However, though the unknown size block counter is "0", there are three temporary data blocks (blocks 1, 2, and 4), indicating that reception errors have occurred to 3/5 blocks. Furthermore, more than half blocks have been received with errors. As a result, it is judged that a file cannot be referred to.

As described above, according to the present embodiment, the file block notification information is returned, prior to the file block information, in response to a request to refer to the file block information. With this construction, the protocol decoder or the broadcast data viewer having sent the request can judge whether a file can be referred to by obtaining the file block notification information prior to reception of the file block information. This deletes wasteful reading of a file when the file cannot be referred to.

<Embodiment 2>

Embodiment 2 of the present invention is a broadcast data reception apparatus which estimates a data size of a part excluding the protocol information of a data block judged as not having been received normally, based on a data size of a part
5 excluding the protocol information of a data block judged as having been received normally. The broadcast data reception apparatus then secures a display area corresponding to the estimated data size. Only differences from Embodiment 1 will be described below.

10 FIG. 30 shows the file management information.

The file management information shown in FIG. 30 includes a total number of real blocks 3001, a minimum block size 3002, a maximum block size 3003, and an average block size 3004, in addition to the contents of the file management information
15 shown in FIG. 4.

The total number of real blocks 3001 indicates the number of data blocks received normally.

The minimum block size 3002 indicates a data size of a data block having the smallest data size among the normally
20 received data blocks.

The maximum block size 3003 indicates a data size of a data block having the largest data size among the normally received data blocks.

The average block size 3004 indicates an average of data
25 size of all the normally received data blocks.

002200 00000000

For the above items in the file management information shown in FIG. 30 are calculated not using the data blocks not having been received normally due to a reception error and not using the data blocks having been re-received after having been received normally. The above items in the file management information are updated when a data block not having been received normally is received normally.

FIG. 31 shows calculated results of the minimum block size, maximum block size, average block size, etc.

10 The examples 1 to 3 shown in FIG. 31 includes the minimum block size, maximum block size, average block size, etc. which each have been obtained from the size of the five normally received data blocks.

15 The "estimated value" shown in FIG. 31 is set to a value equivalent to the average block size in this example. The estimated value indicates a temporary data size estimated when the data size is unknown due to the occurrence of a reception error. It should be noted here that the estimated value should not necessarily be the same as the average block size, but may be a value uniquely obtained using a unique arithmetic expression. The estimated value may be an intermediate value between the minimum block size and the maximum block size, for example.

25 The "necessary value" shown in FIG. 31 is set to a value equivalent to the maximum block size in this example. The estimated value indicates a temporary maximum data size that would

be necessary when the data size is unknown due to the occurrence of a reception error. This value can be used as a temporary data size of a work area which is required for a protocol reconstruction by the protocol decoder. It should be noted here
5 that the necessary value should not necessarily be the same as the maximum block size, but may be a value uniquely obtained using a unique arithmetic expression. The necessary value may be obtained by multiplying the maximum block size with a certain safety rate or by performing a statistical calculation, for example.

10 FIG. 32 shows an HTML file displayed by the broadcast data viewer of the present invention, where all the data blocks necessary for the HTML file have been received normally. FIGs. 33 and 34 show an HTML file displayed by the broadcast data viewer of the present invention, where a data section of the HTML file has
15 not been stored due to a reception error or the like and the data size of the not-stored part is unknown, the not-stored part not being displayed.

The display area 3201 shown in FIG. 32 is a display part corresponding to the not-stored part in FIGs. 33 and 34.

20 The display area 3301 (in which "not received" is displayed) shown in FIG. 33 corresponds to the data section not having been stored due to a reception error or the like. Since the data size of the not-stored part is unknown and the size of the corresponding display area cannot be determined, the display
25 area is assigned a predetermined size.

00000000-00000000

The display area 3401 (in which "not received" is displayed) shown in FIG. 34 also corresponds to the data section not having been stored due to a reception error or the like. In FIG. 34, however, the size of the display area corresponds to the "estimated value" obtained from the data size of other normally received data blocks.

As described above, in the broadcast data management system in the present embodiment, when an HTML file for which a data section has not been stored is to be displayed by the broadcast data viewer of the present invention, it is possible to obtain an estimated data size of the data section from the data size of other normally received data blocks, display a blank as the display area corresponding to the estimated value, and display "not received".

When a broadcast data viewer that can display received data immediately is used, the display shown in FIG. 34 can be updated to the display shown in FIG. 32 without making the user feel abnormality when normal data is received during the display of FIG. 34.

<Embodiment 3>
<Details of Broadcast Data Viewer>

Embodiment 3 of the present invention relates to a broadcast data viewer which displays incompletely reproduced broadcast data automatically or based on an instruction from the user.

As described above, the broadcast data viewer in the present embodiment can display a blank as the display area, display "not received", and update the display contents.

03650029.062800

In the above embodiments, a data block in a higher layer
5 is reconstructed when all pieces of protocol information necessary for it have been provided. However, the reconstruction of the data block may be performed when an instruction to display has been received from a user or when all data blocks necessary for it have been received.

10 Each data block is not limited to a HTML file or a data block including a data section constituting image data, but may include a data section constituting whole data corresponding to a screen of a predetermined size whole of which is either displayed at once or viewed by scrolling by a user. The screen of the
15 predetermined size may correspond to, for example, one of (1) a file such as a HTML file including information used for referring to another file and (2) a JPEG file such as a Hyper Text file.

A program that can cause a computer to execute the operations described in the above embodiments may be recorded in
20 a computer-readable record medium, and may be distributed in markets.

The computer-readable record medium may be, for example, a loadable/removable record medium such as a floppy disk, CD, MD, DVD, and memory card, or a record medium fixed in a computer such

as a hard disk and semiconductor memory.

The present invention has been fully described by way of examples with reference to the accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Therefore, unless such changes and
5 modifications depart from the scope of the present invention, they should be construed as being included therein.

00000000.00000000

What is claimed is:

- 1 1. A reception display apparatus for receiving data blocks which
2 are repeatedly transmitted from a broadcasting station at regular
3 intervals and displaying a screen image based on the received data
4 blocks, each of the data blocks including a data section, and data
5 to be displayed as the screen image being divided into a plurality
6 of data sections, the reception display apparatus comprising:
7 a reception means for receiving the data blocks;
8 a data judgement means for judging whether the data
9 section in each received data block is normal;
10 a storage means for storing every data section judged
11 as normal by the data judgement means without storing data
12 sections judged as abnormal;
13 a condition judgement means for judging, before all data
14 sections to be displayed as the screen image are stored in the
15 storage means, whether a condition for displaying the screen image
16 is satisfied; and
17 a display means for displaying, when the condition
18 judgement means judges that the condition is satisfied, a part of
19 the screen image using data sections currently stored in the
20 storage means.

- 1 2. The reception display apparatus of Claim 1, wherein
2 the data judgement means generates, when having judged
3 that a data section is not normal, information indicating that the

4 data section is abnormal, and stores the information into the
5 storage means, and

6 the display means displays either a blank or a notice
7 indicating abnormality of the data section, at a position in the
8 screen image where the data section indicated as abnormal by the
9 information stored in the storage means should be displayed.

1 3. The reception display apparatus of Claim 2, wherein
2 the screen image is either displayed at once on a screen
3 or viewed by scrolling by a user.

1 4. The reception display apparatus of Claim 3, wherein
2 the screen image corresponds to one of (1) a file
3 including information used for referring to another file and (2)
4 a Hyper Text file, and

5 the display means displays a part of the screen image
6 using data sections of one of the file including information used
7 for referring to another file and the Hyper Text file currently
8 stored in the storage means.

1 5. The reception display apparatus of Claim 1, wherein
2 the condition for displaying the screen image used in
3 the judgement by the condition judgement means is that either (1)
4 an instruction to display has been received from a user, or (2)
5 the reception means has received data blocks including all data

6 sections to be displayed as the screen image.

1 6. A reception display apparatus for receiving data blocks which
2 are repeatedly transmitted from a broadcasting station at regular
3 intervals and displaying a screen image based on the received data
4 blocks, each of the data blocks including (1) a data section
5 constituting original data to be displayed as the screen image and
6 (2) protocol information indicating a position of the data section
7 in the original data, the original data being divided into a
8 plurality of data sections, the reception display apparatus
9 comprising:

10 a reception means for receiving the data blocks;

11 a data judgement means for judging whether the data
12 section in each received data block is normal;

13 a storage means for storing (1) the protocol information
14 included in each data block received by the reception means and
15 (2) data sections judged as normal by the data judgement means,
16 the storage means not storing data sections judged as abnormal,
17 and each piece of stored protocol information showing
18 correspondence to a data section from a same data block;

19 a condition judgement means for judging, before all data
20 sections to be displayed as the screen image are stored in the
21 storage means, whether all pieces of protocol information for the
22 screen image have been stored in the storage means; and

23 a display means for, when the condition judgement means

24 judges that all pieces of protocol information for the screen
25 image have been stored in the storage means, displaying a part of
26 the screen image using the data sections currently stored in the
27 storage means and all pieces of protocol information stored in the
28 storage means.

1 7. The reception display apparatus of Claim 6, wherein
2 the data judgement means judges whether the protocol
3 information in each received data block is normal and then judges
4 for each data block that includes protocol information judged as
5 normal whether the data section in the data block is normal, and
6 the storage means stores every piece of protocol
7 information judged as normal.

1 8. The reception display apparatus of Claim 6, wherein
2 when a data section is not stored in the storage means
3 and a piece of protocol information corresponding to the data
4 section is stored in the storage means, the display means displays
5 either a blank or a notice indicating abnormality of the data
6 section, at a position in the screen image which is indicated by
7 the piece of protocol information.

1 9. The reception display apparatus of Claim 6, wherein
2 each piece of protocol information indicates a display
3 area in the screen image corresponding to a data section included

4 in the same data block, and

5 the display means recognizes a display area on the
6 screen image corresponding to a data section not stored in the
7 storage means as a non-display area, and displays in the non-
8 display area, which is indicated by a piece of protocol
9 information corresponding to the data section not stored in the
10 storage means, either a blank or information indicating that a
11 data section has not been received normally.

1 10. The reception display apparatus of Claim 6, wherein

2 each piece of protocol information further indicates a
3 data size of a data section included in the same data block, and

4 the display means generates a non-display area at a
5 position in the screen image where a data section not stored in
6 the storage means should be displayed, the non-display area having
7 a size equivalent to a data size of the data section not stored in
8 the storage means, and the data size and the position being
9 indicated by a piece of protocol information stored in the storage
10 means and corresponding to the data section not stored in the
11 storage means.

1 11. The reception display apparatus of Claim 6, wherein

2 the received data blocks belong to a lowest layer of a
3 plurality of layers, the data blocks in the lowest layer being
4 generated through the plurality of layers from the original data

5 in a highest layer so that each data block in each layer includes
6 (1) a data section which constitutes a data block in a next-higher
7 layer and (2) a piece of protocol information which indicates a
8 position of the data section included in the same data block, the
9 highest layer not including protocol information but consisting of
10 the original data which corresponds to the screen image,

11 the receiving means receives each data block in the
12 lowest layer,

13 the data judgement means judges whether the data section
14 in each received data block is normal,

15 the storage means stores (1) the protocol information
16 included in each data block received by the reception means and
17 (2) every data section judged as normal by the data judgement
18 means,

19 the condition judgement means judges, before all data
20 sections constituting a data block in a second-lowest layer are
21 stored in the storage means, whether all pieces of protocol
22 information necessary for the data block in the second-lowest
23 layer have been stored in the storage means,

24 when having judged so, reconstructs the data block in
25 the second-lowest layer by using data sections in the lowest layer
26 currently stored in the storage means and all corresponding pieces
27 of protocol information in the lowest layer stored in the storage
28 means,

29 repeats such a reconstruction of a data block until the

30 condition judgement means judges, before all data sections
31 constituting the original data in the highest layer are
32 reconstructed, that all pieces of protocol information necessary
33 for reconstructing the original data in the highest layer have
34 been prepared, and

35 at this point of time, the display means displays a part
36 of the screen image using the data sections in the second-highest
37 layer having been reconstructed so far and the all pieces of
38 protocol information in the second-highest layer necessary for
39 reconstructing the original data in the highest layer.

1 12. The reception display apparatus of Claim 6, wherein
2 the screen image is either displayed at once on a screen
3 or viewed by scrolling by a user.

1 13. The reception display apparatus of Claim 11, wherein
2 the screen image corresponds to one of (1) a file
3 including information used for referring to another file and (2)
4 a Hyper Text file, and

5 the display means displays a part of the screen image
6 using data sections of one of the file including information used
7 for referring to another file and the Hyper Text file currently
8 stored in the storage means.

1 14. A reception display method for receiving data blocks which are

2 repeatedly transmitted from a broadcasting station at regular
3 intervals and displaying a screen image based on the received data
4 blocks, each of the data blocks including a data section, and data
5 to be displayed as the screen image being divided into a plurality
6 of data sections, the reception display method comprising:

7 a reception step for receiving the data blocks;

8 a data judgement step for judging whether the data
9 section in each received data block is normal;

10 a storage step for storing every data section judged as
11 normal in the data judgement step without storing data sections
12 judged as abnormal;

13 a condition judgement step for judging, before all data
14 sections to be displayed as the screen image are stored, whether
15 a condition for displaying the screen image is satisfied; and

16 a display step for, when the condition judgement step
17 judges that the condition is satisfied, displaying a part of the
18 screen image using currently stored data sections.

1 15. The reception display method of Claim 14, wherein

2 the data judgement step generates, when having judged
3 that a data section is not normal, information indicating that the
4 data section is abnormal, and stores the information, and

5 the display step displays either a blank or a notice
6 indicating abnormality of the data section, at a position in the
7 screen image where the data section indicated as abnormal by the

8 stored information should be displayed.

1 16. A reception display method for receiving data blocks which
2 are repeatedly transmitted from a broadcasting station at regular
3 intervals and displaying a screen image based on the received data
4 blocks, each of the data blocks including (1) a data section
5 constituting original data to be displayed as the screen image and
6 (2) protocol information indicating a position of the data section
7 in the original data, the original data being divided into a
8 plurality of data sections, the reception display method
9 comprising:

10 a reception step for receiving the data blocks;

11 a data judgement step for judging whether the data
12 section in each received data block is normal;

13 a storage step for storing (1) the protocol information
14 included in each data block received in the reception step and (2)
15 data sections judged as normal in the data judgement step, the
16 storage step not storing data sections judged as abnormal, and
17 each piece of stored protocol information showing correspondence
18 to a data section from a same data block;

19 a condition judgement step for judging, before all data
20 sections to be displayed as the screen image are stored, whether
21 all pieces of protocol information for the screen image have been
22 stored; and

23 a display step for, when the condition judgement step

24 judges that all pieces of protocol information for the screen
25 image have been stored, displaying a part of the screen image
26 using the currently stored data sections and all pieces of stored
27 protocol information.

1 17. A computer-readable record medium recording a reception
2 display program for receiving data blocks which are repeatedly
3 transmitted from a broadcasting station at regular intervals and
4 displaying a screen image based on the received data blocks, each
5 of the data blocks including a data section, and data to be
6 displayed as the screen image being divided into a plurality of
7 data sections, the reception display program causing a computer to
8 execute:

9 a reception step for receiving the data blocks;

10 a data judgement step for judging whether the data
11 section in each received data block is normal;

12 a storage step for storing every data section judged as
13 normal in the data judgement step without storing data sections
14 judged as abnormal;

15 a condition judgement step for judging, before all data
16 sections to be displayed as the screen image are stored, whether
17 a condition for displaying the screen image is satisfied; and

18 a display step for, when the condition judgement step
19 judges that the condition is satisfied, displaying a part of the
20 screen image using currently stored data sections.

1 18. The computer-readable record medium of Claim 17, wherein
2 the data judgement step generates, when having judged
3 that a data section is not normal, information indicating that the
4 data section is abnormal, and stores the information, and
5 the display step displays either a blank or a notice
6 indicating abnormality of the data section, at a position in the
7 screen image where the data section indicated as abnormal by the
8 stored information should be displayed.

1 19. A computer-readable record medium recording a reception
2 display program for receiving data blocks which are repeatedly
3 transmitted from a broadcasting station at regular intervals and
4 displaying a screen image based on the received data blocks, each
5 of the data blocks including (1) a data section constituting
6 original data to be displayed as the screen image and (2) protocol
7 information indicating a position of the data section in the
8 original data, the original data being divided into a plurality of
9 data sections, the reception display program causing a computer to
10 execute:

11 a reception step for receiving the data blocks;
12 a data judgement step for judging whether the data
13 section in each received data block is normal;
14 a storage step for storing (1) the protocol information
15 included in each data block received in the reception step and (2)

16 data sections judged as normal in the data judgement step, the
17 storage step not storing data sections judged as abnormal, and
18 each piece of stored protocol information showing correspondence
19 to a data section from a same data block;

20 a condition judgement step for judging, before all data
21 sections to be displayed as the screen image are stored, whether
22 all pieces of protocol information for the screen image have been
23 stored; and

24 a display step for, when the condition judgement step
25 judges that all pieces of protocol information for the screen
26 image have been stored, displaying a part of the screen image
27 using the currently stored data sections and all pieces of stored
28 protocol information.

ABSTRACT OF THE DISCLOSURE

A reception display apparatus for receiving data blocks repeatedly transmitted from a broadcasting station at regular intervals and displaying a screen image based on the received data blocks. Each of the data blocks including a data section. Data
5 to be displayed as the screen image is divided into a plurality of data sections. The reception display apparatus comprises: a reception means for receiving the data blocks; a data judgement means for judging whether the data section in each received data block is normal; a storage means for storing every data section
10 judged as normal by the data judgement means without storing data sections judged as abnormal; a condition judgement means for judging, before all data sections to be displayed as the screen image are stored in the storage means, whether a condition for displaying the screen image is satisfied; and a display means for
15 displaying, when the condition judgement means judges that the condition is satisfied, a part of the screen image using data sections currently stored in the storage means.

00000000-00000000

JOSEPH W. PRICE
ALBIN H. GESS
MICHAEL J. MOFFATT
GORDON E. GRAY III
BRADLEY D. BLANCHE

OF COUNSEL
JAMES T. KIRK

PRICE AND GESS

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION

TELEPHONE: (949) 261-8433

FACSIMILE: (949) 261-9072

FACSIMILE: (949) 261-1726

e-mail: pgu@pgulaw.com

DRAWINGS - THIRTY-FIVE (35) PAGES

Applicant(s):

Shinji Kawano et al.

Title:

RECEPTION DISPLAY APPARATUS AND METHOD
FOR DISPLAYING SCREEN PARTIALLY WITH
CERTAIN TIMING EVEN WHEN ALL DATA FOR THE
SCREEN HAS NOT BEEN RECEIVED, AND
COMPUTER-READABLE RECORD MEDIUM
RECORDING SUCH RECEPTION DISPLAY
PROGRAM

Attorney's


Docket No.:

NAK1-BM33

"EXPRESS MAIL" MAILING
LABEL NO. EL230379066US

DATE OF DEPOSIT: August 28, 2000

FIG. 1

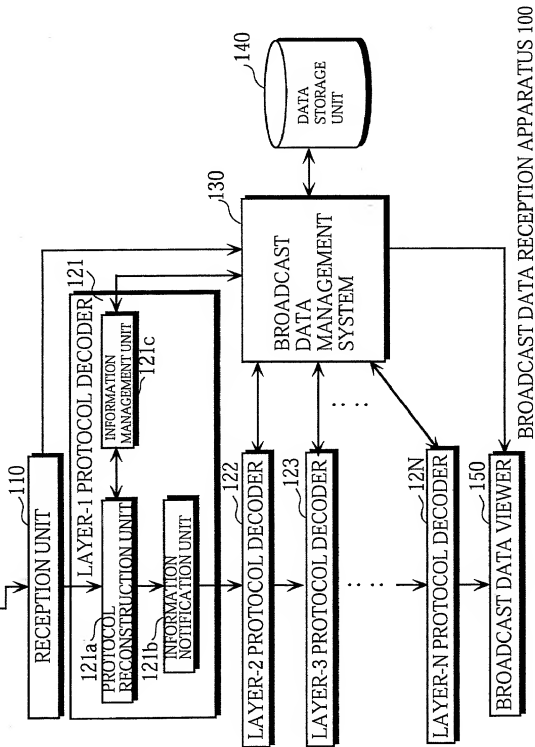

BROADCAST DATA RECEPTION APPARATUS 100


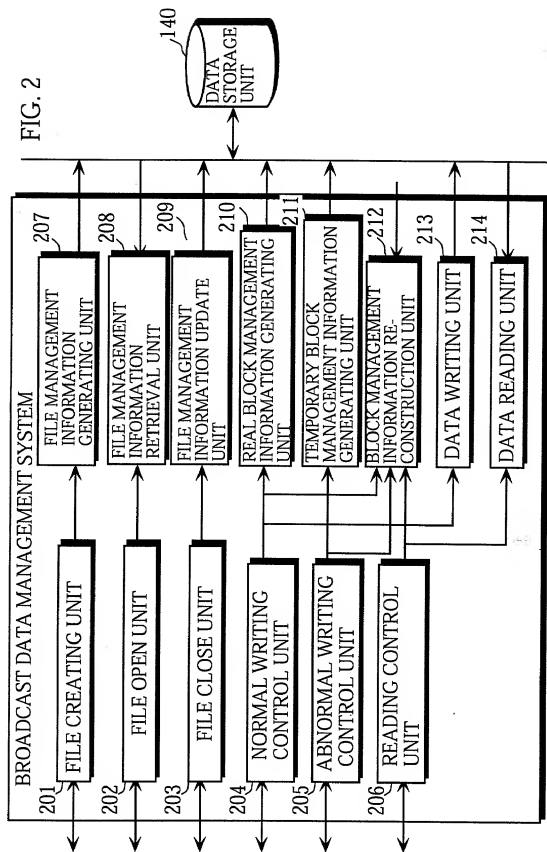


FIG. 3

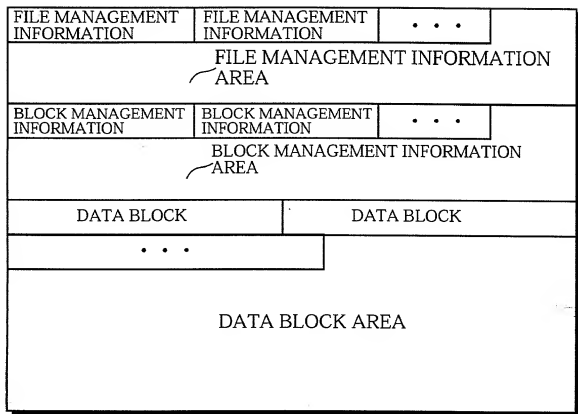

00550029-082800

FIG. 4

FILE MANAGEMENT
INFORMATION

USE FLAG	401
BLOCK MANAGEMENT INFORMATION IDENTIFIER	402
RECEPTION FILE ID	403
FILE SIZE	404
STORED FILE SIZE	405

FIG. 5

BLOCK MANAGEMENT
INFORMATION

NEXT INFORMATION IDENTIFIER	501
USE FLAG	502
BLOCK TYPE	503
NUMBER OF STORED PIECES OF DATA	504
BLOCK SIZE	505
START SERIAL NUMBER	506
END SERIAL NUMBER	507
DATA INDEX	508
⋮	
DATA INDEX	508

FIG. 6

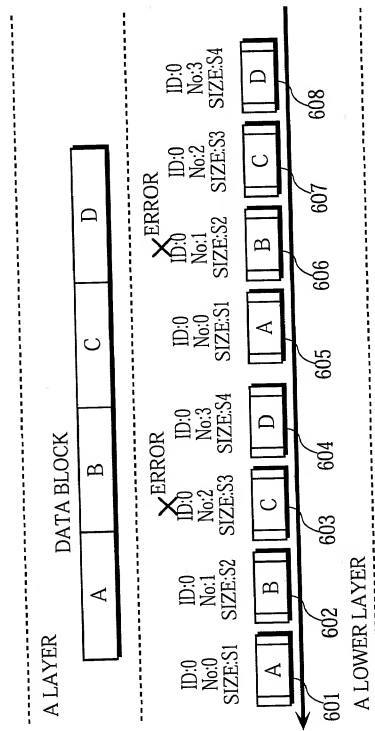


FIG. 7

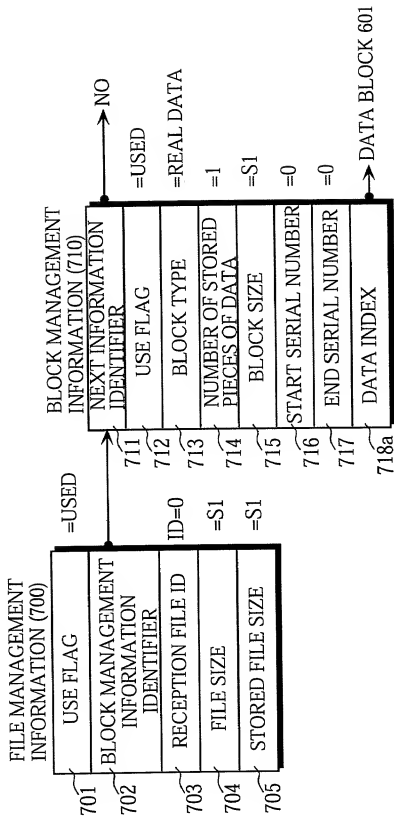


FIG. 8

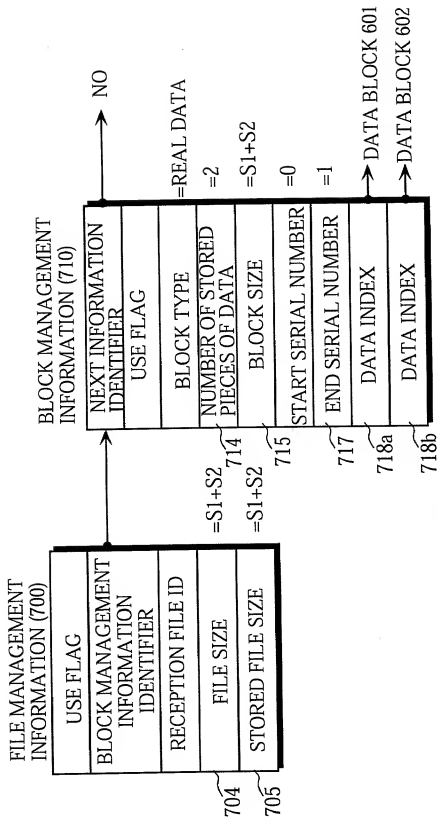


FIG. 9

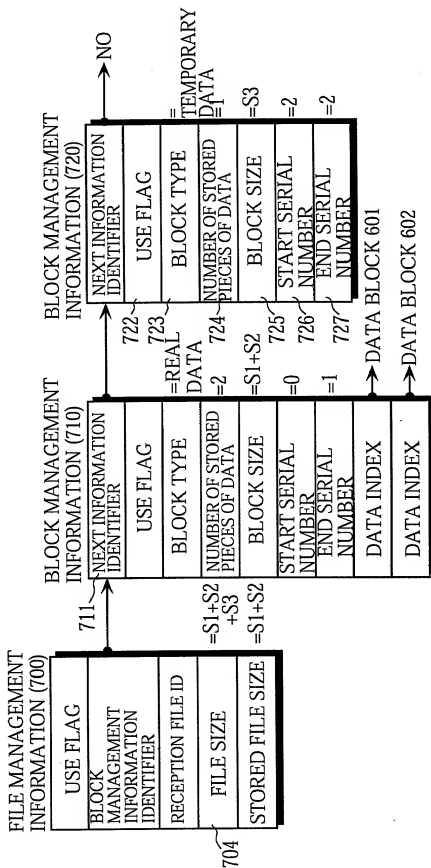
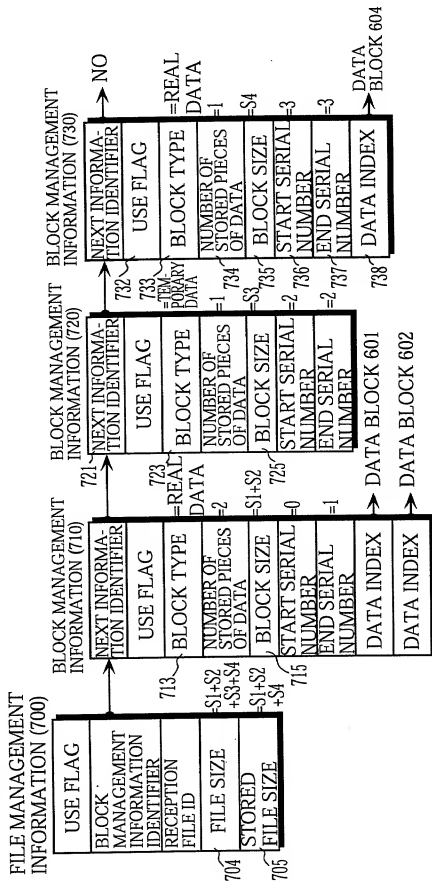


FIG. 10



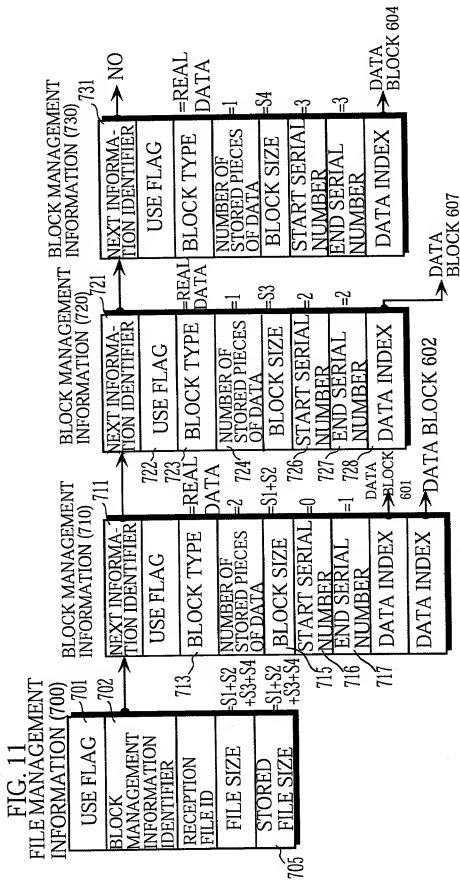


FIG. 13

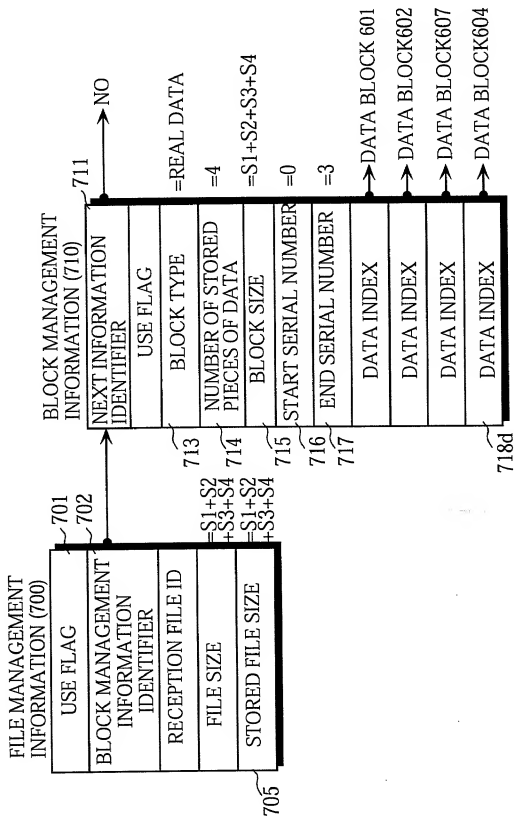


FIG. 14

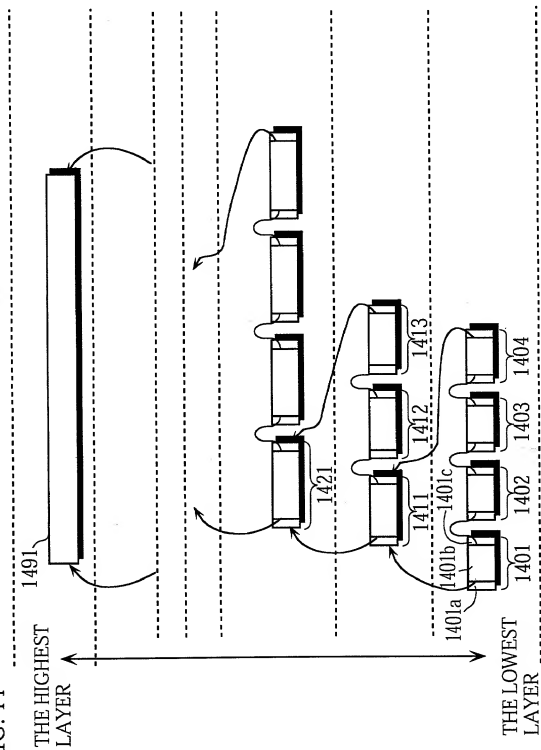


FIG. 15

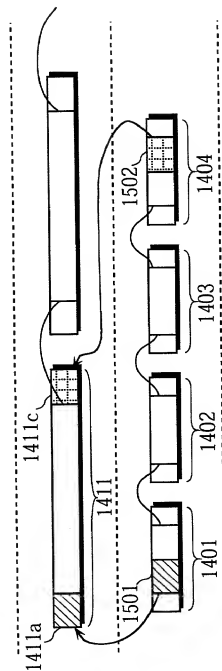


FIG. 16

BLOCK MANAGEMENT
INFORMATION (710)

NEXT INFORMATION IDENTIFIER	501
USE FLAG	502
BLOCK TYPE	503
NUMBER OF STORED PIECES OF DATA	504
BLOCK SIZE	505
START SERIAL NUMBER	506
END SERIAL NUMBER	507
DATA INDEX	508
⋮	
DATA INDEX	508
TARGET SERIAL NUMBER	1601
EFFECTIVE BLOCK OFFSET	1602
EFFECTIVE BLOCK SIZE	1603
⋮	

00000000 00000000

FIG. 17A

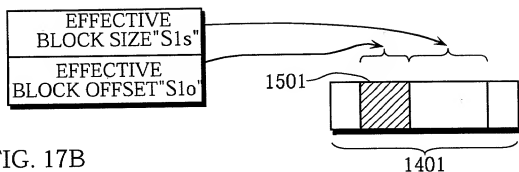
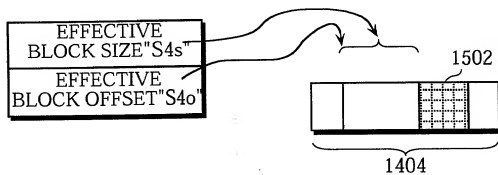


FIG. 17B



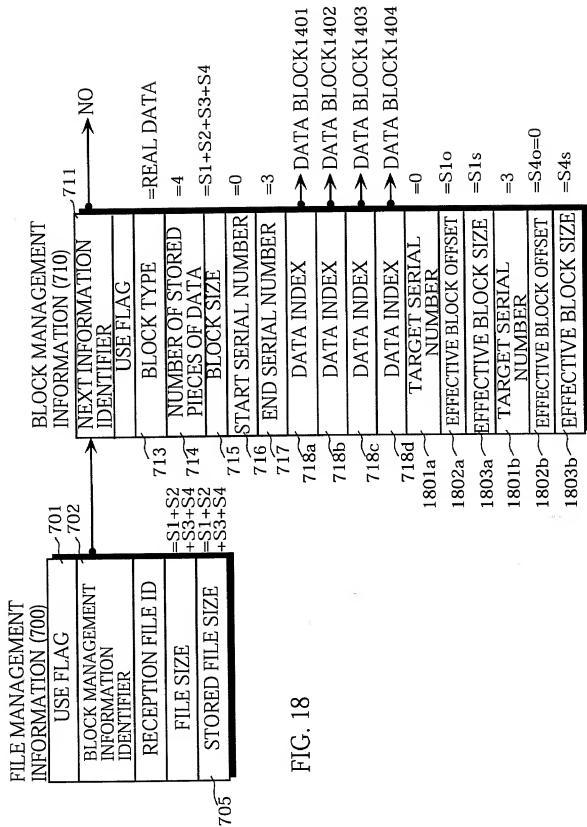
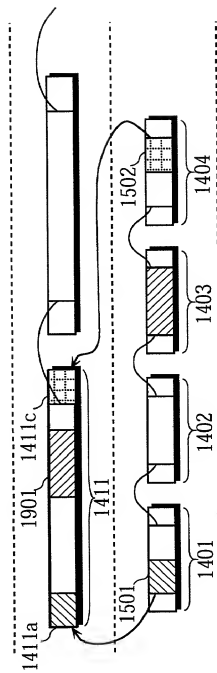


FIG. 18

FIG. 19



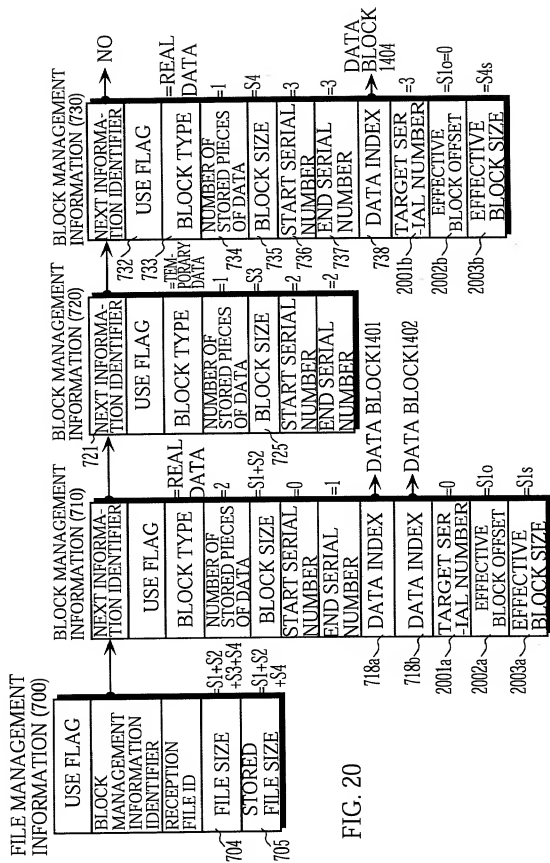


FIG. 21

2101

```

<HEAD>
<TITLE>TOUR GUIDE TO HIROSHIMA</TITLE>
</HEAD>
<BODY BGCOLOR="silver" TEXT="black">
<H1><STRONG><U>TOUR GUIDE TO HIROSHIMA</U></H1>
</STRONG></BODY></H4>
<BLOCKQUOTE>
<UL>
</BLOCKQUOTE>
</BLOCKQUOTE>
<LI><H4><A HREF="Shiro.html">HIROSHIMA CASTLE</A>
<LI><A HREF="Shukkei.html">SHUKKEI-EN GARDEN</A>

```

2102

```

<LI><A HREF="Heiwa.html">A-BOMB DOME AND
    PEACE MEMORIAL PARK</A>
<LI><A HREF="Kyuujo.html">HIROSHIMA MUNICIPAL
    BASEBALL STADIUM</A>
<LI><A HREF="Miyajima.html">MIYAJIMA AND ITSUKUSHIMA
    SHRINE</A></H4>
</UL>
<HR>
<H4><OL>
<LI><A HREF="HiroShu.html">TOUR GUIDE TO HIROSHIMA
    AREA</A>
<LI><A HREF="HiroKen.html">TOUR GUIDE TO HIROSHIMA
    PREFECTURE</A>
</OL><H4>
</HTML>

```

FIG.22

TOUR GUIDE TO HIROSHIMA

- HIROSHIMA CASTLE
- SHUKKEI-EN GARDEN
- A-BOMB DOME AND PEACE MEMORIAL PARK
- HIROSHIMA MUNICIPAL BASEBALL STADIUM
- MIYAJIMA AND ITSUKUSHIMA SHRINE

-
1. TOUR GUIDE TO HIROSHIMA AREA
 2. TOUR GUIDE TO HIROSHIMA PREFECTURE

FIG.23

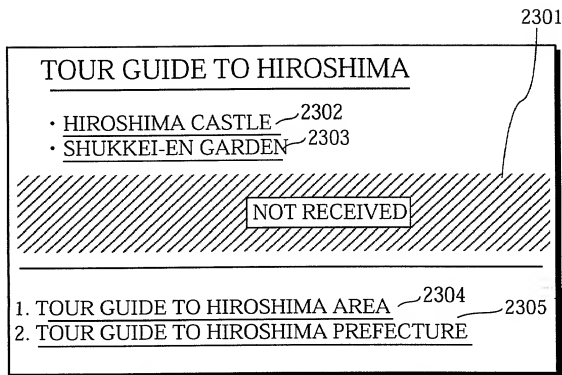


FIG. 24

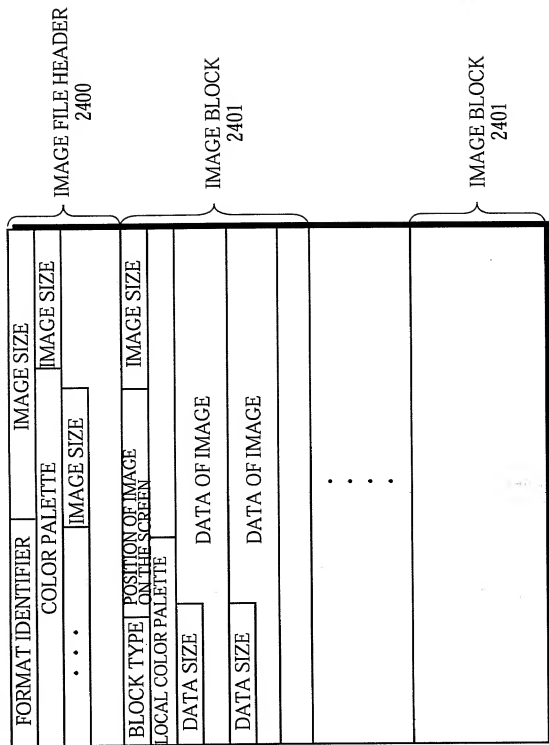


FIG. 26A

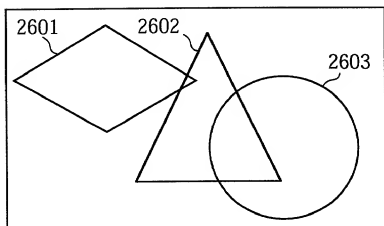


FIG. 26B

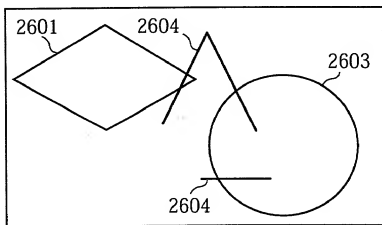


FIG. 27

FILE BLOCK NOTIFICATION
INFORMATION (2700)

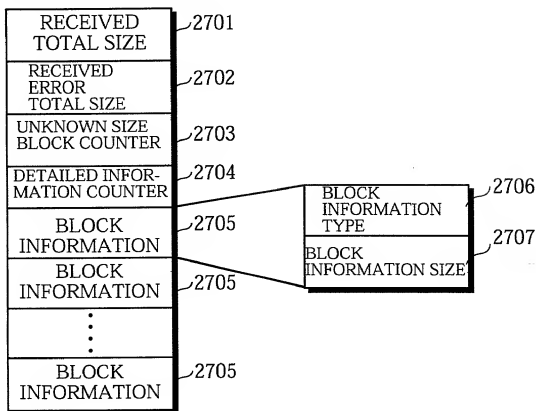


FIG. 28

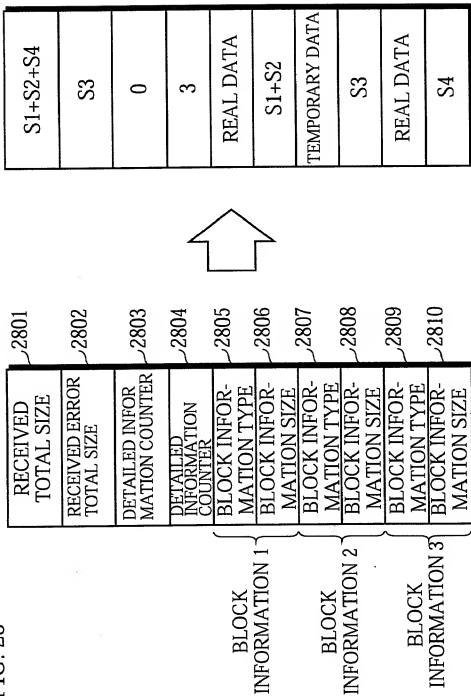


FIG. 29

	RECEIVED TOTAL SIZE	RECEIVED ERROR TOTAL SIZE	UNKNOWN SIZE BLOCK COUNTER	DETAILED INFORMATION COUNTER	BLOCK 1		BLOCK 2		BLOCK 3		BLOCK 4		BLOCK 5	
					TYPE	SIZE	TYPE	SIZE	TYPE	SIZE	TYPE	SIZE	TYPE	SIZE
EXAM- PLE 1	400	50	0	3	REAL	200	TEM- PORARY	50	REAL	200	--	--	--	--
EXAM- PLE 2	40	300	0	3	REAL	20	TEM- PORARY	300	REAL	20	--	--	--	--
EXAM- PLE 3	400	0	3	4	TEM- PORARY	0	TEM- PORARY	0	REAL	400	TEM- PORARY	0	--	--
EXAM- PLE 4	400	50	0	5	TEM- PORARY	10	TEM- PORARY	20	REAL	200	TEM- PORARY	20	REAL	20

FIG. 30

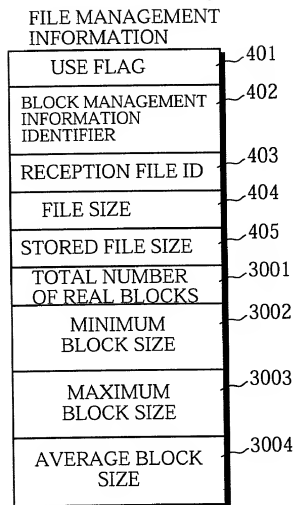


FIG. 31

	REAL BLOCK SIZE					MINI-MUM	MAXI-MUM	AVER-AGE	ESTIMATED VALUE	NECESSARY VALUE
EXAM- PLE 1	100	200	100	100	200	100	200	140	140	200
EXAM- PLE 2	100	800	300	600	200	100	800	400	400	800
EXAM- PLE 3	400	400	400	400	100	100	400	340	340	400

[illegible]

TOUR GUIDE TO HIROSHIMA

- HIROSHIMA CASTLE

- SHUKKEI-EN GARDEN
- A-BOMB DOME AND PEACE MEMORIAL PARK
- HIROSHIMA MUNICIPAL BASEBALL STADIUM
- MIYAJIMA AND ITSUKUSHIMA SHRINE
- HIJIIYAMA PARK
- MIWAKU-NO-SATO
- ASA ZOO

1. TOUR GUIDE TO HIROSHIMA AREA
2. OUR GUIDE TO HIROSHIMA PREFECTURE

FIG. 33

003280 62005960

3301

TOUR GUIDE TO HIROSHIMA

• HIROSHIMA CASTLE

NOT RECEIVED

1. TOUR GUIDE TO HIROSHIMA AREA
2. TOUR GUIDE TO HIROSHIMA PREFECTURE

FIG. 34

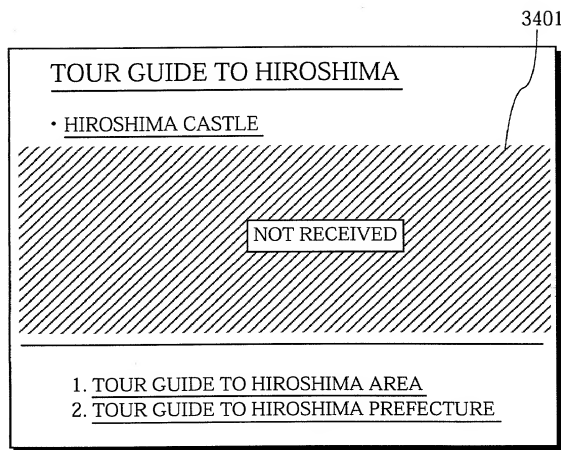


FIG. 35

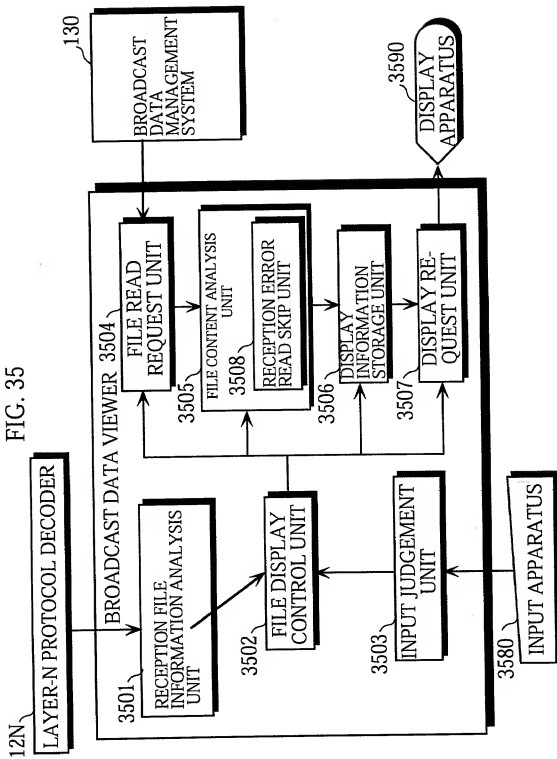


FIG. 36


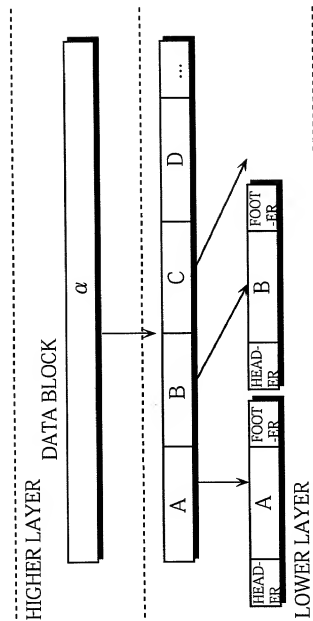


FIG. 37

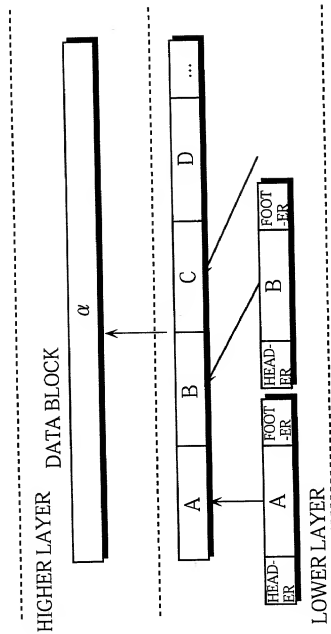

JOSEPH W. PRICE
ALBIN H. GESS
MICHAEL J. MOFFATT
GORDON E. GRAY III
BRADLEY D. BLANCHE

OF COUNSEL
JAMES T. KIRK

PRICE AND GESS

ATTORNEYS AT LAW

2100 S.E. MAIN STREET, SUITE 250

IRVINE, CALIFORNIA 92614-6238

A PROFESSIONAL CORPORATION

TELEPHONE: (949) 261-8433

FACSIMILE: (949) 261-9072

FACSIMILE: (949) 261-1726

e-mail: pgu@pgulaw.com

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Applicant(s): Shinji Kawano et al.

Title: RECEPTION DISPLAY APPARATUS AND METHOD
FOR DISPLAYING SCREEN PARTIALLY WITH
CERTAIN TIMING EVEN WHEN ALL DATA FOR THE
SCREEN HAS NOT BEEN RECEIVED, AND
COMPUTER-READABLE RECORD MEDIUM
RECORDING SUCH RECEPTION DISPLAY
PROGRAM

Attorney's

Docket No.:

NAK1-BM33

"EXPRESS MAIL" MAILING
LABEL NO. EL230379066US

DATE OF DEPOSIT: August 28, 2000

Docket No.
NAK1-BM33

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

RECEPTION DISPLAY APPARATUS AND METHOD FOR DISPLAYING SCREEN
PARTIALLY WITH CERTAIN TIMING EVEN WHEN ALL DATA FOR THE SCREEN
HAS NOT BEEN RECEIVED, AND COMPUTER-READABLE RECORD MEDIUM
RECORDING SUCH RECEPTION DISPLAY PROGRAM

the specification of which

(check one)

☒ is attached hereto.

was filed on _____ as United States Application No. or PCT International

Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

11-254767	Japan	8/September/1999	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Joseph W. Price, Reg. No. 25,124

Albin H. Gess, Reg. No. 25,726

Franklin D. Ubell, Reg. No. 27,009

Doyle B. Johnson, Reg. No. 39,240

Michael J. Moffatt, Reg. No. 39,304

Bradley D. Blanche, Reg. No. 38,387

Send Correspondence to: Joseph W. Price
PRICE, GESS & UBELL
2100 S.E. Main St., Ste. 250
Irvine, CA 92614

Direct Telephone Calls to: (name and telephone number)
Joseph W. Price, 949/261-8433

Full name of sole or first inventor	Shinji KAWANO	
Sole or first inventor's signature	Shinji Kawano	Date August 21, 2000
Residence	3-3-7-402, Rakurakuen, Saeki-ku, Hiroshima-shi, Hiroshima-ken 731-5136 Japan	
Citizenship	Japan	
Post Office Address	same as residence	

Full name of second inventor, if any	Toshitaka HANAURA	
Second inventor's signature	Toshitaka Hanamura	Date August 21, 2000
Residence	1-26-18-303, Takata, Nishi-ku, Hiroshima-shi, Hiroshima-ken 733-0851 Japan	
Citizenship	Japan	
Post Office Address	same as residence	

Full name of third inventor, if any	
Eiji UEDA	
Third inventor's signature	Date
Eiji Ueda	August 21, 2000
Residence	
227-1, Yasuuracho, Toyota-gun, Hiroshima-ken 729-2507 Japan	
Citizenship	
Japan	
Post Office Address	
same as residence	

Full name of fourth inventor, if any	
Futoshi NAKABE	
Fourth inventor's signature	Date
Futoshi Nakabe	August 21, 2000
Residence	
8-22-14, Nishihara, Asaminami-ku, Hiroshima-shi, Hiroshima-ken 731-0113 Japan	
Citizenship	
Japan	
Post Office Address	
same as residence	

Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	